
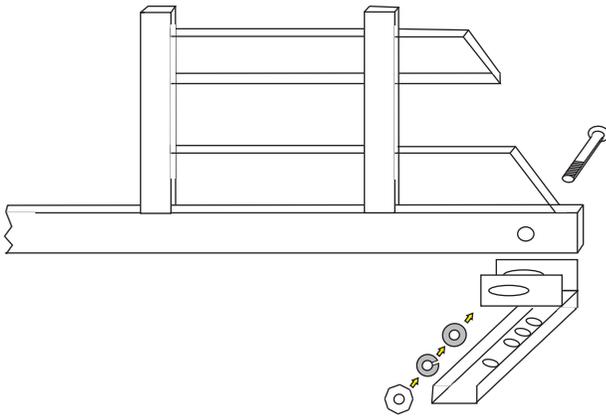


# Dodge Cargo Guard Installation


## Step 1

1. Insert the mounting bolt down through truck box pocket.
2. 3/4" washer, 3/4 lock washer, 3/4 nut do not tighten fully

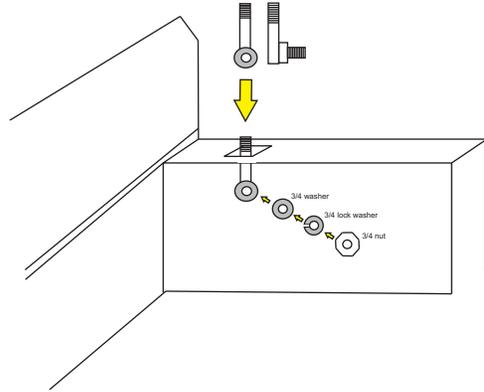

## Step 2

1. Place Guard onto the mounting bracket
2. Using the 1/2 x 3 1/4 carriage bolt, come through the back side of the bracket and rack.
3. Use 1/2 washer, 1/2 lock washer, then 1/2 nylon locknut Do not tighten


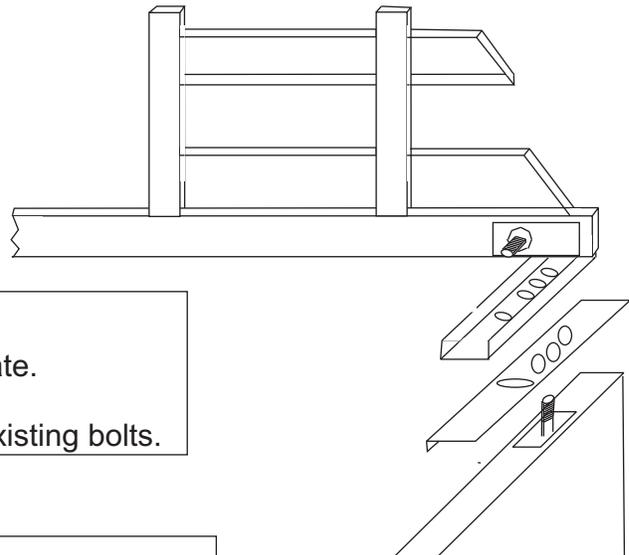


## Step 3

1. Place Spacer Plate on the truck rail first.
2. Place the cargo guard on top of Spacer Plate.
3. Use a 1/2 lock washer, 1/2 nut and tighten.
4. After everything is in place tighten all the existing bolts.


## Hardware

-  3/4 Washer x2
-  3/4 Lock washer x2
-  3/4 Nut x2
-  Mounting Bolts x2
-  1/2 Carriage bolt x2
-  1/2 Washer x4
-  1/2 Lock washer x2
-  1/2 Nylon locking nut x2
-  1/2 Nut x2

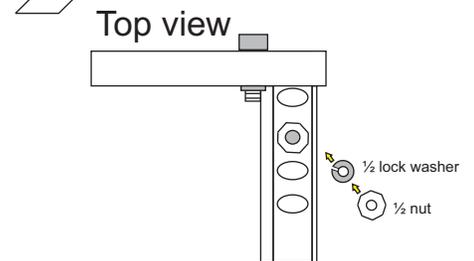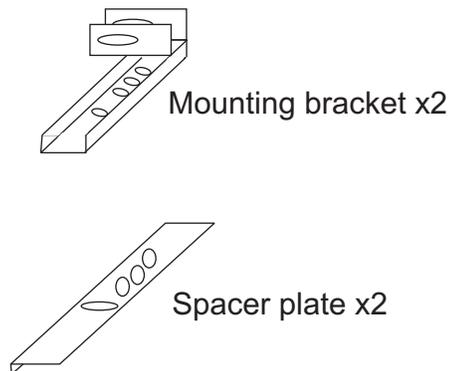


# Light Bracket Instructions

## Offset 8" Light

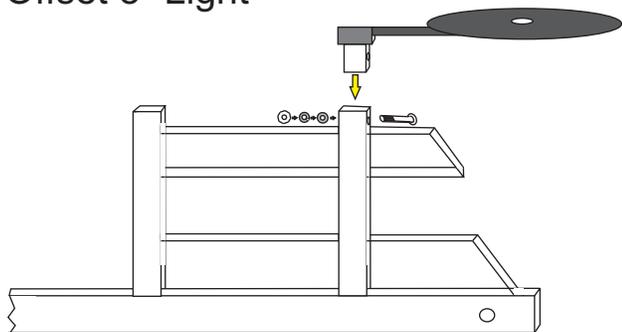


- Remove plastic cap.
- Insert light bracket into cargo rack.
- Bolt together using  $\frac{1}{2}$  x 3 hex bolt.
- Tighten to secure.

## Cross Member Light

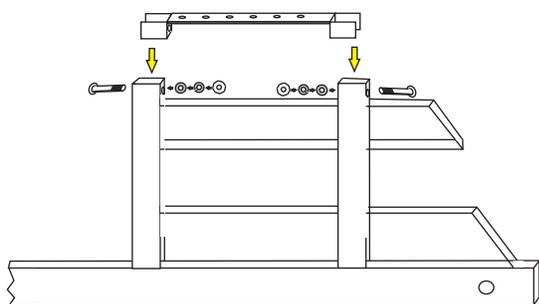


- Remove plastic caps.
- Insert cross bracket into cargo rack.
- Bolt together using  $\frac{1}{2}$  x 3 hex bolt on either side.
- Tighten to secure.

## 6" Light Bracket

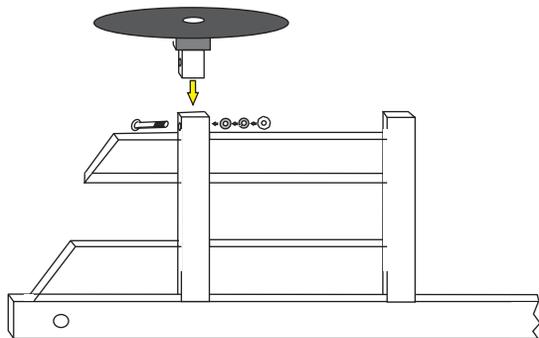

- Remove plastic cap.
- Insert light bracket into cargo rack.
- Bolt together using  $\frac{1}{2}$  x 3 hex bolt.
- Tighten to secure.

## Arrow Bracket

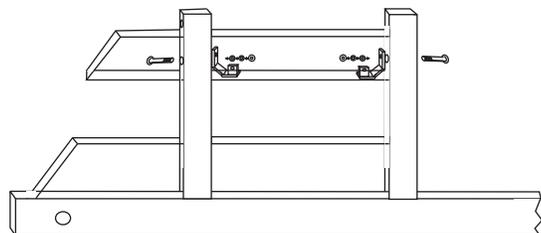



- Remove plastic cap.
- Place arrow bracket inbetween 2" flat bar.
- Bolt together using  $\frac{5}{16}$  x 2  $\frac{1}{2}$  hex bolt.
- Tighten to secure.

# F 150

## Cargo Guard Installation


### Step 1

1. Insert the mounting bolt down through truck box pocket.
2. 3/4" washer, 3/4 lock washer, 3/4 nut do not tighten fully

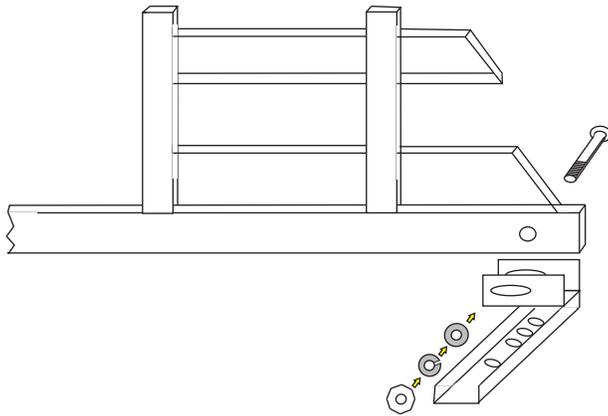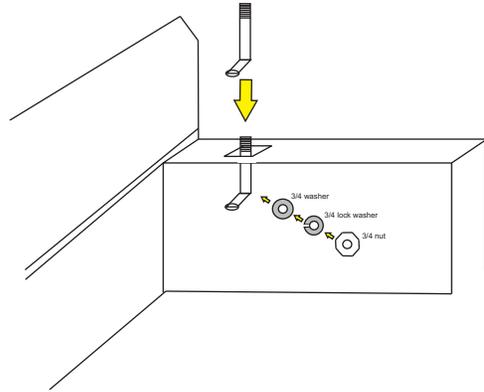

### Step 2

1. Place Guard onto the mounting bracket
2. Using the 1/2 x 3 1/4 carriage bolt, come through the back side of the bracket and rack.
3. Use 1/2 washer, 1/2 lock washer, then 1/2 nylon locknut Do not tighten



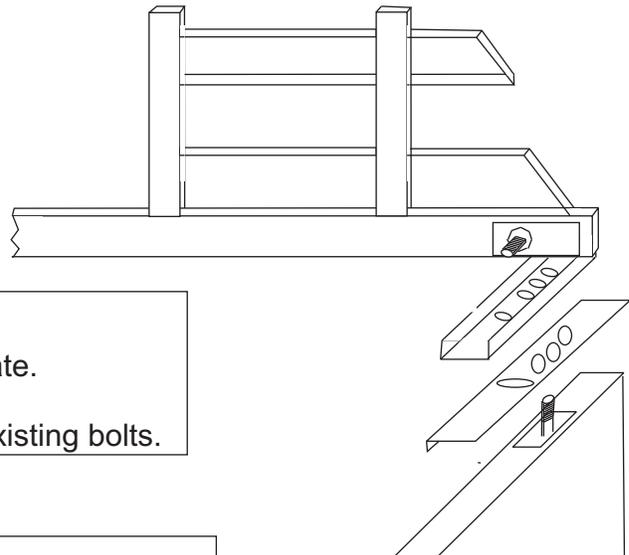


### Step 3

1. Place Spacer Plate on the truck rail first.
2. Place the cargo guard on top of Spacer Plate.
3. Use a 1/2 lock washer, 1/2 nut and tighten.
4. After everything is in place tighten all the existing bolts.

### Hardware

- 3/4 Washer x2
- 3/4 Lock washer x2
- 3/4 Nut x2
- Mounting Bolts x2
- 1/2 Carriage bolt x2
- 1/2 Washer x4
- 1/2 Lock washer x2
- 1/2 Nylon locking nut x2
- 1/2 Nut x2

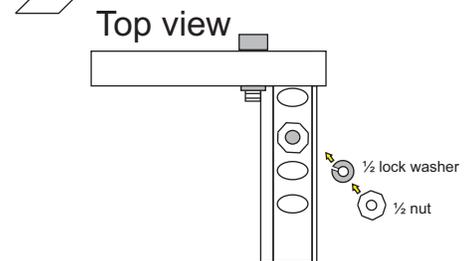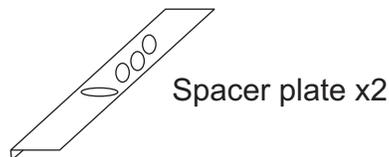
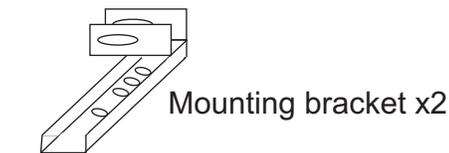


# F 250

## Cargo Guard Installation


### Step 1

1. Insert the mounting bolt down through truck box pocket.
2. 3/4" washer, 3/4 lock washer, 3/4 nut do not tighten fully

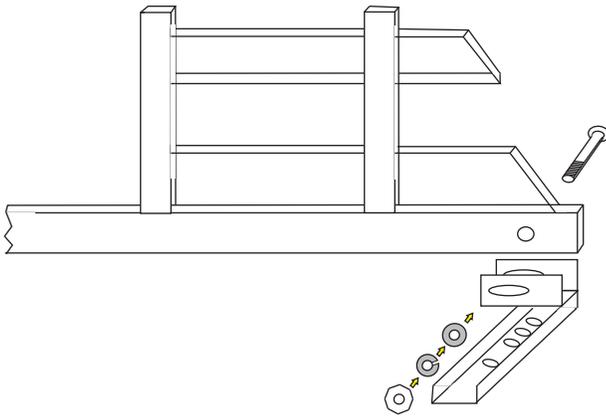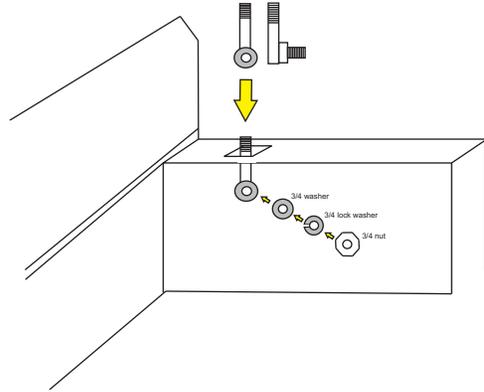

### Step 2

1. Place Guard onto the mounting bracket
2. Using the 1/2 x 3 1/4 carriage bolt, come through the back side of the bracket and rack.
3. Use 1/2 washer, 1/2 lock washer, then 1/2 nylon locknut Do not tighten



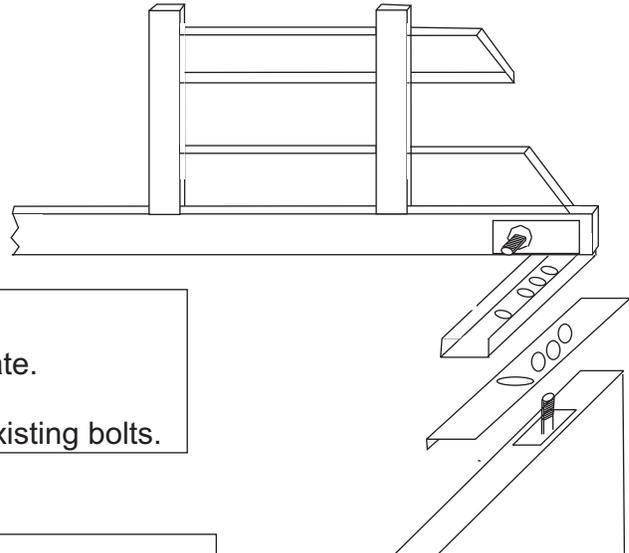


### Step 3

1. Place Spacer Plate on the truck rail first.
2. Place the cargo guard on top of Spacer Plate.
3. Use a 1/2 lock washer, 1/2 nut and tighten.
4. After everything is in place tighten all the existing bolts.

## Hardware



- 3/4 Washer x2
- 3/4 Lock washer x2
- 3/4 Nut x2
- Mounting Bolts x2
- 1/2 Carriage bolt x2
- 1/2 Washer x4
- 1/2 Lock washer x2
- 1/2 Nylon locking nut x2
- 1/2 Nut x2

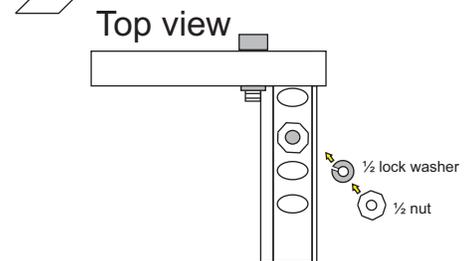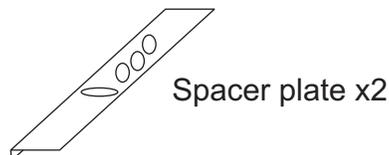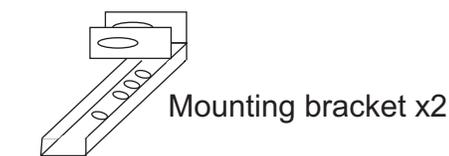

# Chev Cargo Guard Installation


## Step 1

1. Insert the mounting bolt down through truck box pocket.
2. 3/4" washer, 3/4 lock washer, 3/4 nut do not tighten fully

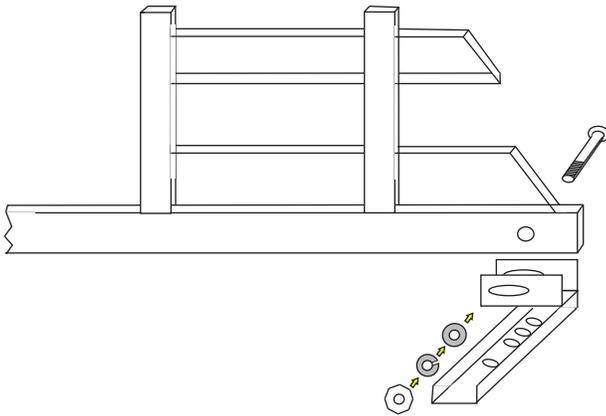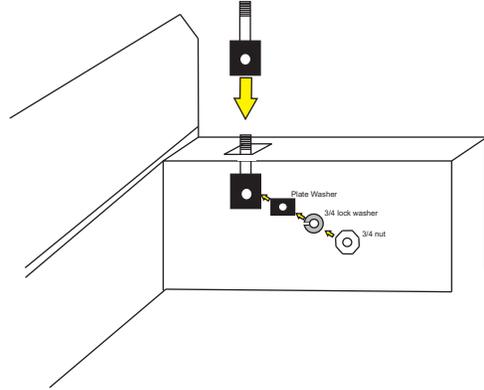

## Step 2

1. Place Guard onto the mounting bracket
2. Using the 1/2 x 3 1/4 carriage bolt, come through the back side of the bracket and rack.
3. Use 1/2 washer, 1/2 lock washer, then 1/2 nylon locknut Do not tighten

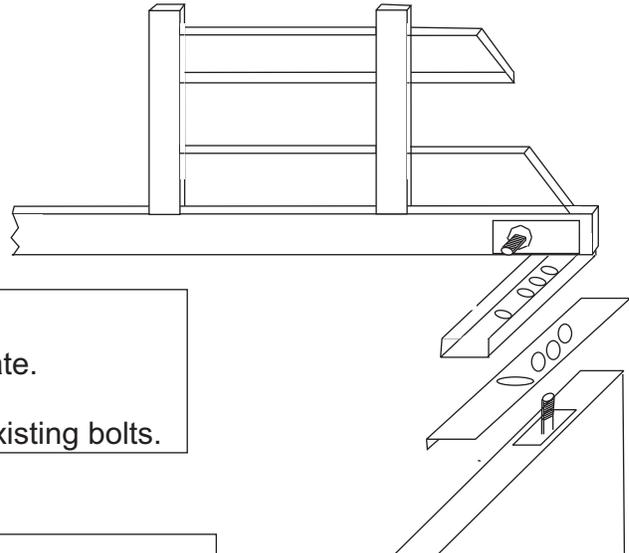

## Step 3

1. Place Spacer Plate on the truck rail first.
2. Place the cargo guard on top of Spacer Plate.
3. Use a 1/2 lock washer, 1/2 nut and tighten.
4. After everything is in place tighten all the existing bolts.

## Hardware

- Plate Washer x2
- ⊙ 3/4 Lock washer x2
- ⊙ 3/4 Nut x2
- Mounting Bolts x2
- ⊙ 1/2 Carriage bolt x2
- ⊙ 1/2 Washer x4
- ⊙ 1/2 Lock washer x2
- ⊙ 1/2 Nylon locking nut x2
- ⊙ 1/2 Nut x2

